


D-210

MULTI-PURPOSE BALL MOUNT

5/29/2008

GROSS LOAD CAPACITY WHEN USED AS A WEIGHT CARRYING HITCH: 6000 LBS. TRAILER WEIGHT & 600 LBS. TONGUE WEIGHT.
*****DO NOT EXCEED VEHICLE MANUFACTURER'S RECOMMENDED TOWING CAPACITY.*****

WARNING: Some under vehicle receivers have a lower towing capacity than this ball mount. Do not exceed these towing capacities. Be sure to check the hitch pin and locking device before towing any trailers.

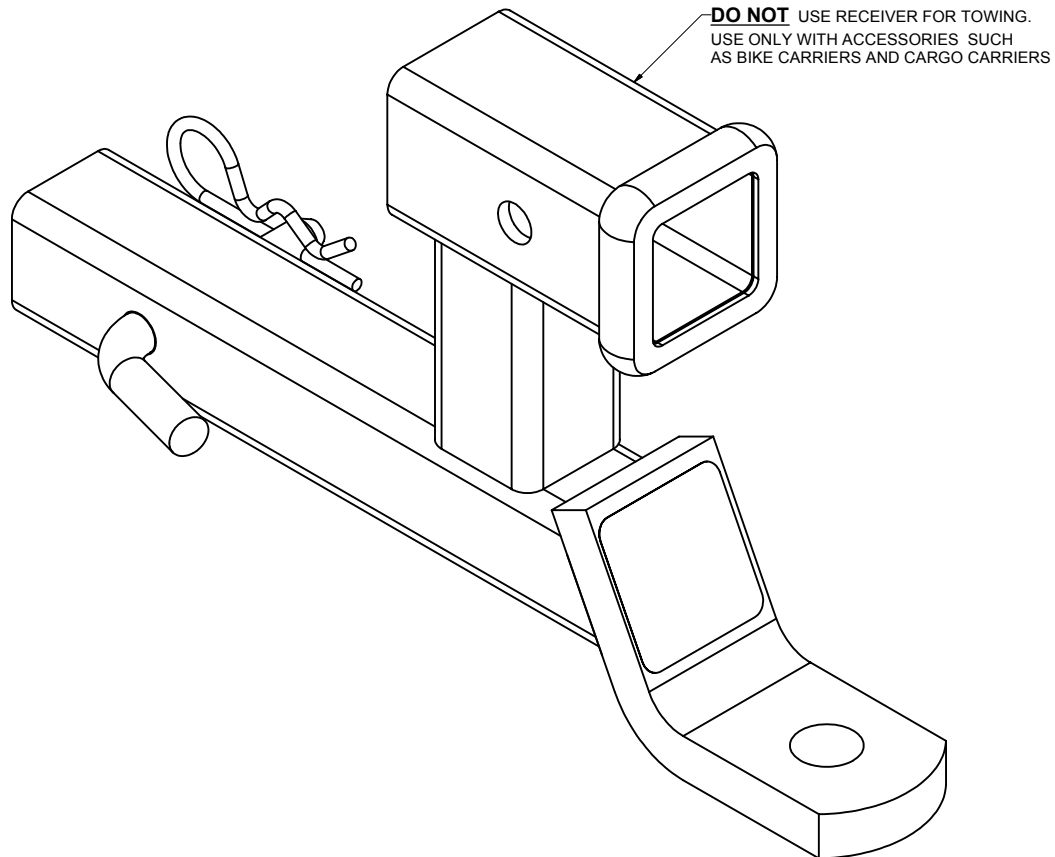

INSTALLATION STEPS

- 1) This ball mount must be inserted into a 2" square receiver and must be secured with a 5/8" diameter hitch pin with locking device. It should never be bolted or welded to a bumper.
- 2) All accessories used in receiver must have a 2" square shank and must be secured with a 5/8" diameter hitch pin with locking device.
- 3) This ball mount is a weight carrying device that must be used in the lowered position.
- 4) Use hitch ball with a 1" diameter shank on this ball mount. With a socket and torque wrench, tighten nut to 240 ft lbs. torque.
- 5) Although CURT ball mounts are designed and tested to safely carry the loads specified, under no circumstance does CURT recommend exceeding the towing vehicles recommended towing capacities.

PERIODICALLY CHECK THIS BALL MOUNT TO ENSURE THAT ALL PINS AND CLIPS ARE INSTALLED CORRECTLY AND THAT ALL COMPONENTS ARE STRUCTURALLY SOUND.

Curt Manufacturing Inc., warrants this product to be free of defects in material and/or workmanship at the time of retail purchase by the original purchaser. If the product is found to be defective, Curt Manufacturing Inc., may repair or replace the product, at their option, when the product is returned, prepaid, with proof of purchase. Alteration to, misuse of, or improper installation of this product voids the warranty. Curt Manufacturing Inc.'s liability is limited to repair or replacement of products found to be defective, and specifically excludes liability for incidental or consequential loss or damage.